




DLX-MA/M *

- Foot/Wall mounted solenoid-driven diaphragm metering pumps.
- Manufactured in accordance with **CE** regulations.
- IP65 enclosure protection.

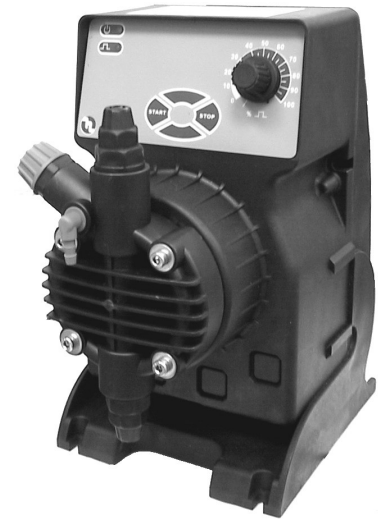

DLXB-MA/A *

* Actual look may differ slightly, depending on model chosen.

	WALL MOUNTED		FOOT MOUNTED
TYPES	DLX-MA/AD	<ul style="list-style-type: none"> ■ Analogue electronics. ■ Flow control: manual. 	DLXB-MA/AD
	DLX-MA/M	<ul style="list-style-type: none"> ■ Microprocessor electronics. ■ Flow control: manual. 	DLXB-MA/M
	DLX-MF/M	<ul style="list-style-type: none"> ■ Microprocessor electronics. ■ Flow control: manual / timer / water meter / milliamp signal. 	DLXB-MF/M
	DLX-PH/M	<ul style="list-style-type: none"> ■ Microprocessor electronics. ■ Flow control: proportional, only by built-in pH controller. 	DLXB-PH/M
	DLX-RX/M	<ul style="list-style-type: none"> ■ Microprocessor electronics. ■ Flow control: proportional, only by built-in ORP controller. 	DLXB-RX/M
	DLX-CL/M	<ul style="list-style-type: none"> ■ Microprocessor electronics. ■ Flow control: proportional, only by built-in Chlorine controller. 	DLXB-CL/M
	DLX-CD/M	<ul style="list-style-type: none"> ■ Microprocessor electronics. ■ Flow control: proportional, only by built-in TDS controller. 	DLXB-CD/M

MODELS	Model	l/hr	bar
	1-15	1	15
	2-10	2	10
	5-7	5	7
	5-12	5	12
	8-10	8	10
	15-4	15	4
	20-3	20	3

**SPECIFY MODELS NUMBERS AS "TYPE-MODEL"
(EG. "DLXB-MA/A 5-7")**

FEATURES		STANDARD	OPTIONS
	Electricals	230V/50-60Hz/1ph	110, 240V.
	Body/casing (non-wetted)	Plastic	-
	Pumphead assembly	PP	PVC, PTFE.
	Check valves	Viton (lip type)	Lip types: EPDM, NBR, Silicon. Ball types: Glass Pyrex.
	Diaphragm	Entirely PTFE	-
	Suction / discharge tube (2m)	PVC / PP	-
	Filter (footvalve) & injection valve	PP (injection valve is 3/8" BSPm)	-
	4-20 mA output	-PH/M, -RX/M, -CL/M, -CD/M only.	-